

100WVDC AND UNDER

(pF)

Diameter	Temperature Characteristics								
dØ ± 1m/m	NPO	N75	N150	N220	N330	N470	N750	SL(GP)	N1500
4	1 - 24	1 - 12	1 - 24	1 - 27	1 - 27	1 - 33	1 - 43	1 - 68	27 - 56
5	25 - 47	13 - 22	25 - 47	28 - 47	28 - 47	34 - 47	44 - 82	72 - 100	62 - 100
6	50 - 100	24 - 33	50 - 100	50 - 100	50 - 100	50 - 100	83 - 100	120 - 220	120 - 220
8	120 - 150	35 - 68	120 - 150	120 - 150	120 - 150	120 - 150	120 - 150	250 - 470	250 - 470
10	180 - 220	72 - 130	180 - 220	180 - 220	180 - 220	180 - 220	180 - 250	500 - 620	500 - 620
12	250 - 300	140 - 180	250 - 300	250 - 300	250 - 300	250 - 300	250 - 300	680 - 1000	680 - 1000

500WVDC

Diameter	Temperature Characteristics								
dØ ± 1m/m	NPO	N75	N150	N220	N330	N470	N750	SL(GP)	N1500
5	1 - 22	1 - 15	1 - 22	1 - 22	1 - 22	1 - 22	1 - 27	1 - 47	27 - 47
6	25 - 39	18 - 22	25 - 39	25 - 39	25 - 39	25 - 39	30 - 39	50 - 100	50 - 100
8	47 - 82	25 - 47	47 - 82	47 - 82	47 - 82	47 - 82	40 - 82	120 - 180	120 - 180
10	91 - 120	50 - 68	91 - 120	91 - 120	91 - 120	91 - 120	91 - 150	200 - 330	200 - 330
12	150 - 220	72 - 120	150 - 220	150 - 220	150 - 220	150 - 220	180 - 220	350 - 500	350 - 500

1000WVDC

Diameter	Temperature Characteristics							
dØ ± 1m/m	NPO	N150	N220	N330	N470	N750	SL(GP)	
5	1 - 15	1 - 15	1 - 15	1 - 15	1 - 15	1 - 22	1 - 47	
6	18 - 33	18 - 33	18 - 33	18 - 33	18 - 33	24 - 39	50 - 100	
8	35 - 68	35 - 68	35 - 68	35 - 68	35 - 68	40 - 82	120 - 180	
10	72 - 120	72 - 120	72 - 120	72 - 120	72 - 120	91 - 150	200 - 330	
12	150 - 180	150 - 180	150 - 180	150 - 180	150 - 180	180 - 220	350 - 500	

100WVDC AND UNDER

(pF)

Diameter	Temperature Characteristic			
dØ ± 1m/m	Y5F	Y5P	Z5U	Z5V
4	100 - 470	200 - 1000	1000 - 2700	1000 - 5000
5	500 - 680	1200 - 1500	3000 - 3900	5600 - 8200
6	820 - 1000	1800 - 2200	4000 - 5600	10000
8	1200 - 2700	2500 - 5600	6800 - 10000	22000 - 33000
10	3000 - 5600	6200 - 10000	22000 - 100000	40000 - 100000

500WVDC

Diameter	Temperature Characteristic			
dØ ± 1m/m	Y5F	Y5P	Z5U	Z5V
5	100 - 330	200 - 560	1000 - 3000	2000 - 3300
6	350 - 500	620 - 1000	3300 - 3900	3900 - 4700
8	560 - 1200	1200 - 2200	4700 - 6800	5000 - 8200
10	1500 - 2200	2500 - 3900	8200 - 10000	10000 - 15000
12	2500 - 3300	4000 - 5600	12000 - 15000	20000
14	2500 - 5000	6200 - 10000	18000 - 33000	22000 - 50000


1000WVDC

Diameter	Temperature Characteristic			
dØ ± 1m/m	Y5F	Y5P	Z5U	Z5V
5	100 - 220	100 - 500	500 - 1200	1000 - 2200
6	250 - 500	560 - 1000	1500 - 2200	2500 - 3300
8	560 - 1200	1200 - 2000	2500 - 5000	3500 - 5600
10	1500 - 2000	2200 - 3300	5000 - 8200	6200 - 10000
12	2200 - 3000	3500 - 5000	10000 - 12000	
14	3300 - 3900	5600 - 6800	15000 - 18000	
16	4200 - 5600	7200 - 10000	20000 - 22000	

Voltages values for sizes of TC not listed above, consult Factory or Area Representative.


(μ F)

REEL PACK

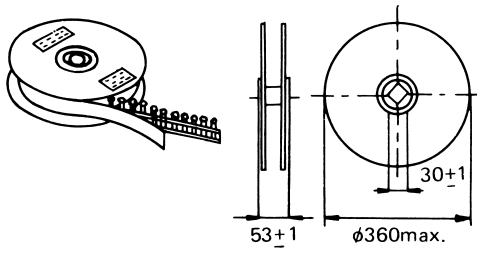

2000 – or 2500 pcs. per reel depending upon dia. of capacitor

AMMO PACK



2000 – 3000 pcs. per box.