
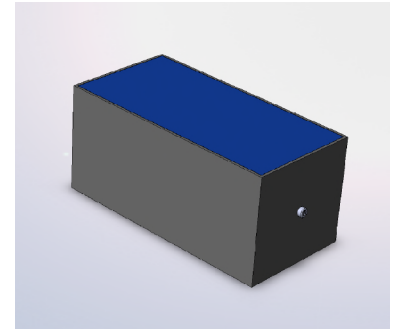


#6024

High Voltage Capacitors

PAM 2500-260 ru K

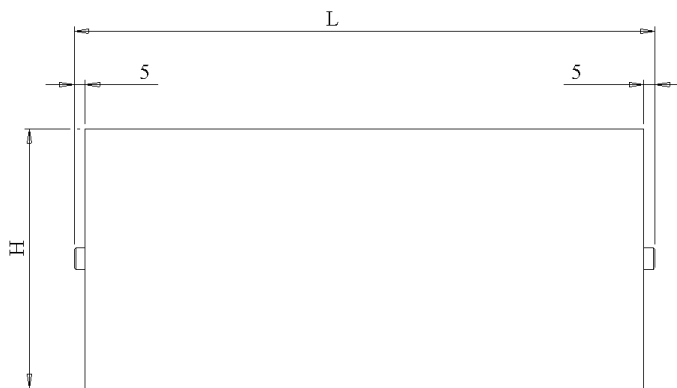

Dielectric of metallized polypropylene - Plastic case

Polyurethane resin sealing - Threaded outputs

Parameter	Symbol		Value	Unit	Condition
Capacitance	C		6.0	nF	1 V / 1 kHz
Tolerance			± 10	%	
Rated voltage	Un AC		25000	VRMS	
Tangent delta	tgδ		7	10-4	1 V / 1 kHz
Stray inductance	ESL		≤ 1000	nH	
Insulation resistance	Ri		> 100'000	MΩ	500 VDC - 1 min
Test voltage between terminals	U T1		87.5	kVAC	50 Hz / 1 min
Lightning Impulse (1.2 / 50 μs)	V cr.		+ 200	kV	10 x
Lightning Impulse (1.2 / 50 μs)	V cr.		- 200	kV	10 x
Operating Temperature			-40 / + 70	°C	
Dimension	Symbol			Unit	Conditions
Width	B		126	mm	
Height	H		117	mm	
Length	L		262	mm	
Terminals					
Thread			M 5 x 10	mm	
	M1				
	M0	07.07.2011	HJJ		
	Modification	Date	Visa émetteur		

Condensateurs CH 1400 Yverdon, Switzerland
 Kondensatoren Tel.: ++41 24 445 66 88
 Capacitors Fax: ++41 24 445 66 89

Leclanché
Capacitors
A FISCHER & ZAUSCHER COMPANY

HJJ

www.Lcap.ch
 01.07.2011

capinfo@Lcap.ch
 faisab6024.XLS