


HIGH VOLTAGE CAPACITOR

PPHF 50-050 d (K)

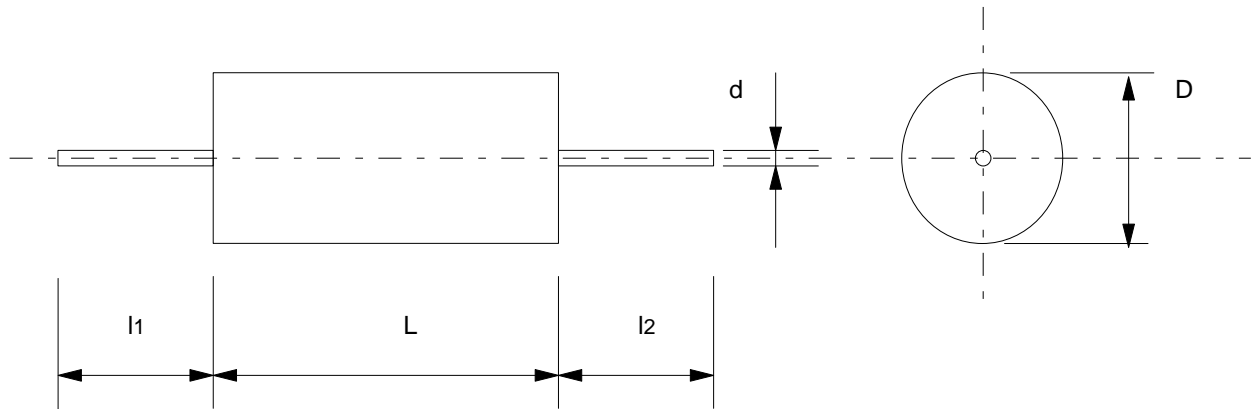

Construction: Axial type, epoxy resin end seal, protective sleeve, leads contact, Film / foil  
Dry technology

Parameter	Symbol		Unit	Conditions
Capacity	C	500	nF	
Tolerance		$\pm 10$	%	
Operating voltage	UnAC	500	VAC	
	UnAC	239	VAC	20 kHz
Admissible RMS current	I <sub>rms</sub>	15	A	500 kHz
ESR		1,1	mΩ	500kHz
Dielectric		Polypropylene		
Parameter	Symbol		Unit	Conditions
Diameter	$\varnothing$	40,5	mm	$\pm 1$ mm
Length	L	133	mm	$\pm 2$ mm
Wire leads	Tinned copper			
Distribution:	M2			
	M1			
	M0	03.04.1997	281	
	Modification	Date	Visa émetteur	

Condensateurs CH 1400 Yverdon, Switzerland  
Kondensatoren Tel.: +41 24 445 66 88  
Capacitors Fax: +41 24 445 66 89

