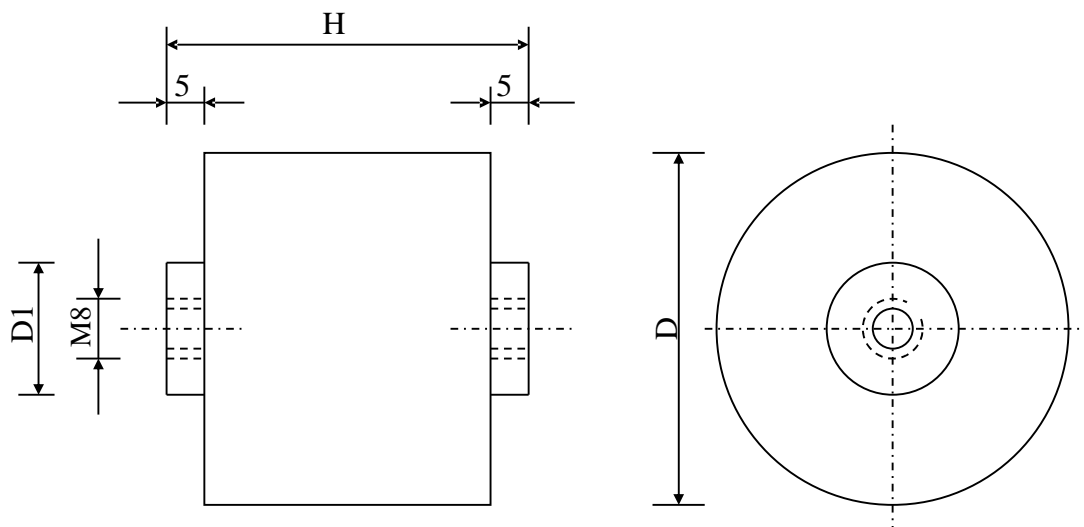


#6274

Power capacitors

PPM 100-1.0  $\mu$ v K

Dielectric of metallized polypropylene - Plastic tube

Polyurethane resin end sealing - Threaded outputs

Parameter	Symbol	Value	Unit	Condition
Capacitance	C	1	$\mu$ F	1 V / 1 kHz
Tolerance		$\pm 10$	%	
Rated voltage	Un DC	1000	VDC	
Rated voltage	Un AC	480	V RMS	20 kHz
Permanent current (45°C / 1 m/s)	I <sub>eff</sub>	90	A RMS	40 kHz
Peak current rep.	I <sub>cr. Max.</sub>	1800	A	
Tangent delta dielectric	tg $\delta$ <sub>o</sub>	2	10 <sup>-4</sup>	1 kHz to 100 kHz
Serie resistance	RS	$\leq 0.3$	m $\Omega$	
Stray inductance	ESL	< 15	nH	
Insulation resistance	R <sub>i</sub> x C	> 30'000	s	500 VDC - 1 min
Test voltage between terminals	U T1	1600	VDC	10 s
Estimated operational life (-3%)		> 200'000	h	Un DC - 70°C
Dimension	Symbol	Value	Unit	Conditions
Diameter	$\varnothing$ D	91	mm	
Height	H	55 + 0 / -2	mm	
Termina				
Thread		M8 x 8	mm	
	D1	22	mm	
	M1			
	M0			
	Modification	Date	Visa émetteur	

Condensateurs CH 1400 Yverdon, Switzerland  
 Kondensatoren Tel.: ++41 24 445 66 88  
 Capacitors Fax: ++41 24 445 66 89

**Leclanché**  
**Capacitors**  
A FRESCHET & TAUSSCHER COMPANY

HJJ

www.Lcap.ch  
 10.03.2014

capinfo@Lcap.ch  
 faisab6274.XLS