


#6135

METALLIZED POLYPROPYLENE CAPACITORS

PPM 300-339 g K

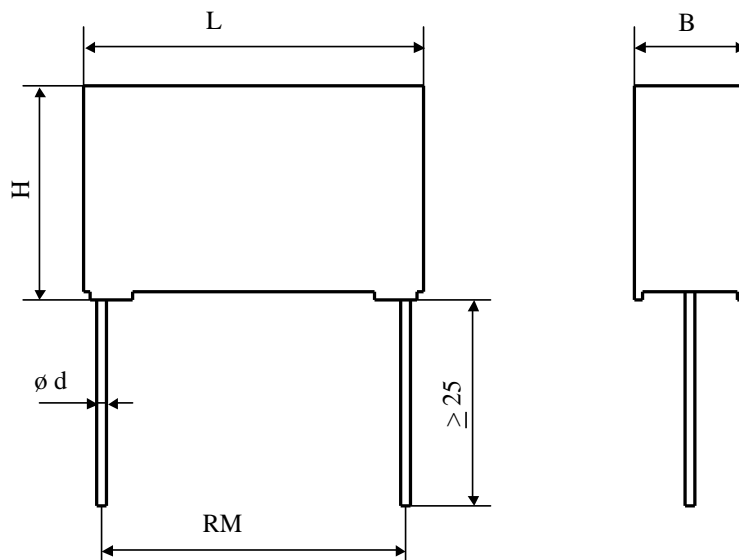

Dielectric of metallized polypropylene

Self-extinguishing plastic housing / Epoxy resin sealing

Parameter	Symbol		Value	Unit	Condition
Capacitance	C		390	pF	1 V / 1 kHz
Tolerance			± 10	%	
Rated voltage	Un DC		3000	VDC	
Rated voltage	Un AC		500	VAC	50 Hz to 10 kHz
slope of voltage variation	du/dt max.		1000	V/µsec	max. repetitive
Tangente delta	tgδ		1E	1C ⁴	1 V / 1 kHz
Stray inductance	ESL		≤ 40	nH	
Insulation resistance	Ri		> 100'000	MΩ	100 VDC - 1 min
Test voltage between terminals	U T1		4000	VDC	10 s
Test voltage between terminals	U T1		1500	VAC	50-60 Hz - 1 min
Climatic category			55/105/56		
Estimated operational life (-3%)			100'000	h	Un DC - 70°C
Dimension	Symbol			Unit	Conditions
Width	B		6.5	mm	
Height	H		12.5	mm	
Length	L		18	mm	
Terminals					
Axial tinned wire	d		ø 0.8 x 25	mm	
	RM		15	mm	
	M1				
	M0				
	Modification	Date	Visa émetteur		

Condensateurs CH 1401 Yverdon-les-Bains
 Kondensatoren Tel.: ++41 24 445 66 88
 Capacitors Fax: ++41 24 445 66 89

Lecaniché
Capacitors
A FISCHER & TALSCHER COMPANY

HJJ

23.11.2012

faisab6135.XLS