


LCapHK p/n : XF 35-1000 13025

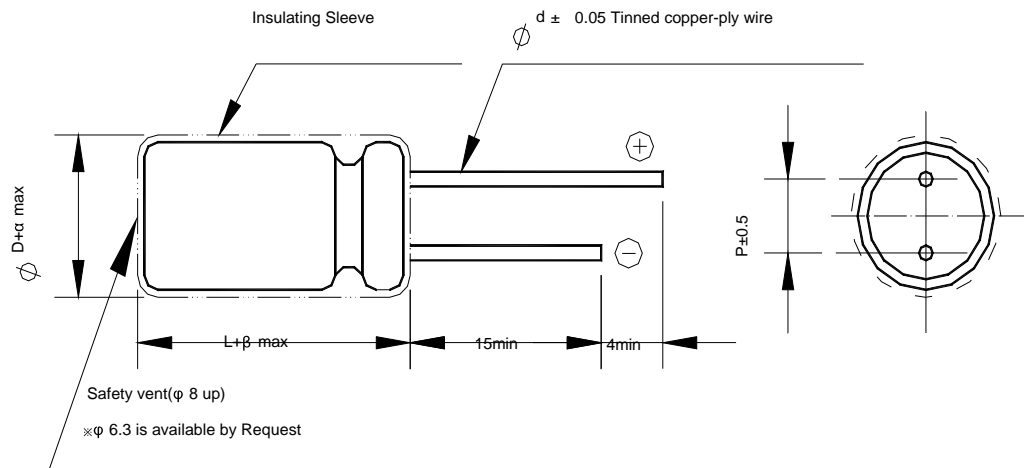

Electrical Parameter

Rated Capacitance (C _R) 120 Hz / 20 °C	1000 μF	
Tolerance	± 20 %	
Rated Voltage (U _R)	35 V	
Leakage Current (I _L) U _R / after 2 min / 20 °C	≤350 μA	
ESR typ. 100 Hz / 20°C	mΩ	
Tan δ typ. 120 Hz / 20°C	≤0.12 %	
Z max. (Impedance) 100 kHz / 20°C	0.048 Ω	
ESL typ.	20 nH	
Rated Ripple Current (I _R) 100 Hz / 105°C	1650 A	
Useful Life @ I _R , U _R , 125°C	8000 H	After 8k hours, capacitor shall meet following criteria : ±25% of C _N , ≤200% original Tan δ, I _L ≤ original value.
IEC Climatic category / Standards	-40°C +105°C	
Dimensions :	ø13 +0.5mm L : 25 +1.5mm Pitch 5.0mm ±0.5mm	
Your article No. / Project		