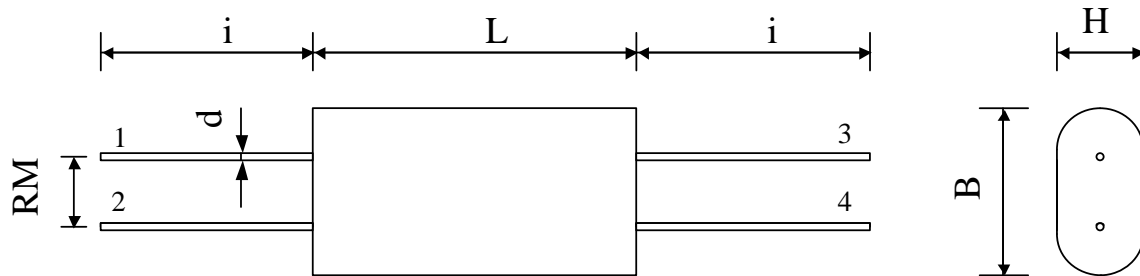


6198


SECURITY CAPACITORS

TYPE
KS-4 150-020 df K

Partially according to NF F62-102

Film-foil polyphenilene sulfude + metal foil

Polyester wrapped / Epoxy resin sealing



Paramètre	Symbol	Value	Unit	Condition
Capacitance	C	200	nF	20°C, 1 kHz
Tolérance		10	%	
Rated voltage	Un DC	1'500	VDC	
Rated temperature		85	°C	
Tangente delta	tgδ	$< 15 \times 10^{-4}$		1 V 1 kHz
Stray inductance	ESL	≤ 25	nH	
Insulation resistance	Ri	$> 25'000$	MΩ	500 VDC - 1 min
Test voltage between terminals	U T	2'400	VDC	10 s.
Operating temperature		- 55 / + 85 °C		
Dimension	Symbole		Unité	Conditions
Width	B max.	35	mm	
Height	H max.	20	mm	
Length	L max.	50	mm	
Terminals				
Radial tinned wire	d	1	mm	
RM		12.7 ± 2.0	mm	
Lenght	i	≥ 38 mm		
	M2			
	M1			
	MC	12.06.2013	HJJ	
	Modification	Date	Visa émetteur	

Condensateurs CH 1400 Yverdon, Switzerland
 Kondensatoren Tel.: ++41 24 445 66 88
 Capacitors Fax: ++41 24 445 66 89

Leclanché
Capacitors
A FISCHER & TALSCHER COMPANY

www.Lcap.ch
 HJJ 11.06.2013
 capinfo@Lcap.ch
 faisab6198.XLS