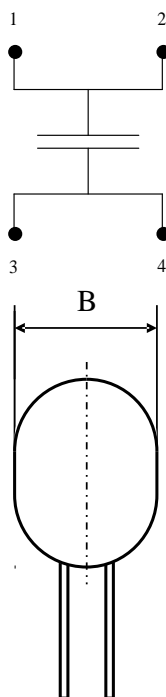
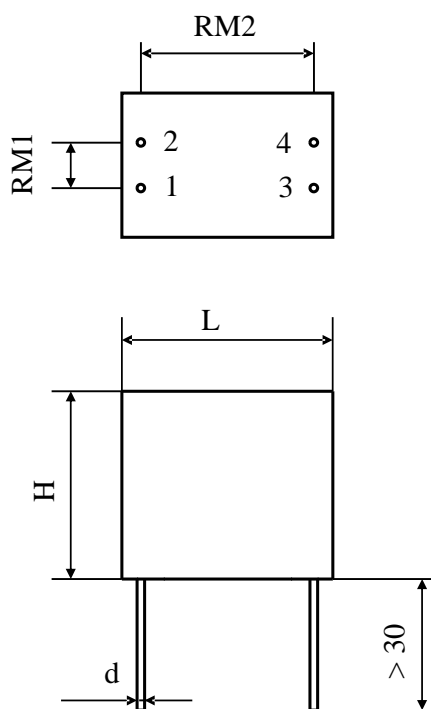


#6296

METALLIZED POLYPROPYLENE CAPACITORS

PPM-4 45-29.0 afv K

Polyester wrapped  
flammability UL 510

Epoxy resin sealing UL 94-V0

Parameter	Symbol		Value	Unit	Condition
Capacitance	C		29	$\mu\text{F}$	1 V / 1 kHz
Tolerance			$\pm 10$	%	
Rated voltage	Un DC		450	VDC	95 °C
Transient voltage	tv		530	V	1 s.
Operating RMS current	I RMS max.		6.4	Aeff	100 °C
Nominal operating RMS current	I RMS		7	Aeff	75 °C
Operating RMS current	I RMS max.		8	Aeff	40 °C
Equivalent serie resistance	ESR		$\leq 4.0$	m $\Omega$	1 kHz
Equivalent serie resistance	ESR		$\leq 4.0$	m $\Omega$	30 kHz
Stray inductance	ESL		$\leq 12$	nH	
Insulation resistance ( 22°C )	Ri		> 300	M $\Omega$	500 VDC - 1 min
Test voltage between terminals	U T1		675	VDC	10 s
Operating temperature			- 55 ... + 95°C	°C	
Short time storage temperature			- 55 ... + 100°C	°C	
Estimated operational life (-3%)			> 100'000	h	530 V / 70°C
Dimension	Symbol			Unit	Conditions
Width	B max.		28	mm	
Length	L max.		35	mm	
Height	H max		44	mm	
Terminals tinned wire ( 4 x )	$\varnothing d$		1.0	mm	
RM1			$7.0 \pm 0.5$	mm	
RM2			$30.5 \pm 0.5$	mm	
	M1				
	M0				
	Modification	Date	Visa émetteur		

Condensateurs CH 1400 Yverdon, Switzerland  
 Kondensatoren Tel.: ++41 24 445 66 88  
 Capacitors Fax: ++41 24 445 66 89

**Leclanché**  
**Capacitors**  
A FISCHER & TAUSSCH COMPANY

HJJ

www.Lcap.ch  
 05.05.2014

capinfo@Lcap.ch  
 faisab6296.XLS