




160 – 480V Solution

AC/DC charger and Maxwell Module(s)

Innovative in energy storage & Power Electronics

- Custom-made solutions
- Complete solution: storage & Power Electronics
- Design and system integration

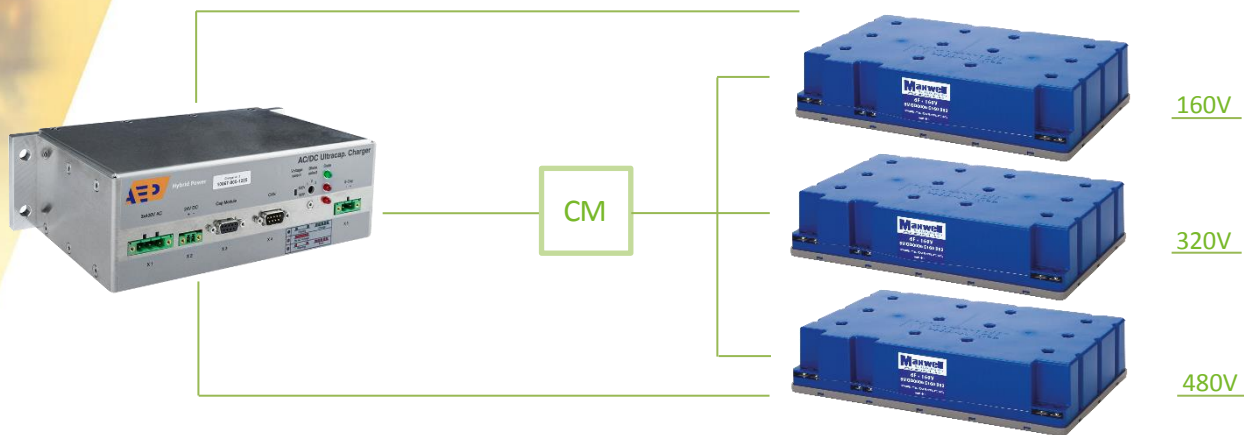

Features

- Long life cycle and life time
- CAN-bus interface
- Current sensing
- Specifications can be customized
- Programmable AC/DC charge
- Approved for heavy-duty shock and vibration norms

Mechanical Data

Charger

Length x Width x Height
137 x 270 x 75 mm (w/o connector lengths)
Approx. 3,0 kg

Module (1x)

Length x Width x Height
367x 235 x 79 mm
Approx. 5,2 kg

Applications

- UPS wind turbine pitching
- Wind turbine LVRT
- Warehouse / logistic AGV
- UPS
- Industrial
- Power supplies

aephybridpower.com
sales@aephybridpower.com
+31 (0)78 692 2100



System Specifications

Symbol	Parameter	Description	Value			Unit
			160V	320V	480V	
	Capacitance		160V	320V	480V	
C _s	Rated power		5,8	2,9	1,9	F
	Tolerance capacity		+20/-0	+20/-0	+20/-0	%
	Voltage					
U _{NOM}	Nominal voltage		160	320	480	V DC
U _{max}	Max. operation voltage		170	340	510	V DC
	Resistance					
ESR _{DC}	Internal resistance		240	480	720	mΩ
	Power (cells in module housing)					
P _d	Charge current	@V _r and ESR,DC _{max} *	27	54	80	kW
	Energy (module)					
E _{max}	Energy	@ V _{max}	21	41	61	Wh
E _{ava}	Available	Between V _{max} and ½ V _{max}	15,75	31,50	47,25	Wh

AC/DC Charger Specifications

Symbol	Parameter	Description	Value	Unit
	General			
P _r	Rated power	@U _{sr} 160VDC, I _{charge} 3A	480	W
f _r	Switching frequency		20	kHz
η _r	Efficiency		>90	%
	Primary side			
U _{pr}	Rated voltage		400	V AC ±10%
U _{p,max}	Max. operating voltage		440	V AC
	Secondary side			
U _{sr}	Rated voltage		160 - 480	V DC
U _{s,max}	Max. operating voltage		500	V DC
I _{charge}	Charge current		3	A
	Energy demand			
	Control voltage		24	V DC ±10%
	Control current		0,5	A




Capacitor Module Specifications

Symbol	Parameter	Description	Value	Unit
	Capacitance			
C_s	Rated capacitance		5,8	F
	Tolerance capacity		+20/-0	%
	Voltage			
U_{NOM}	Nominal charging voltage		160	V DC
U_{MAX}	Max. operating voltage		170	V DC
	Resistance			
ESR_{DC}	Internal resistance		240	m Ω
	Environment			
T_a	Operating temperature range		-40 till +65	$^{\circ}$ C
$T_{STORAGE}$	Storage temperature range		-40 till +70	$^{\circ}$ C
	Protection class		IP54	
	Power (cells only)			
P_d	Rated power density	@ V_r and $ESR_{DC_{max}}^*$	8,01	kW/kg
P_{max}		@ V_{max} and ESR_{AC}^*	9,35	kW/kg
	Power (cells in module housing)			
P_d	Rated power density	@ V_r and $ESR_{DC_{max}}^*$	2,5	kW/kg
P_{max}		@ V_{max} and ESR_{AC}^*	5,1	kW/kg
	Energy (module)			
E_{max}	Energy density	@ V_{max}	4	kW/kg
E_{ava}	Available energy	Between V_{max} and $\frac{1}{2} V_{max}$	15,75	Wh
	Current			
I_{AVG}	Rated continuous current		12	A
I_{LEAK}	Leakage current	After 72 hours at 25 $^{\circ}$ C	25	mA

Mechanical data – Charger

Length x Width x Height: 137 x 270 x 75 mm (w/o connector lengths)
 Weight: 3,0 kg
 Housing: IP40 (connector IP20)
 Mounting: DIN rail mounting on l x h side

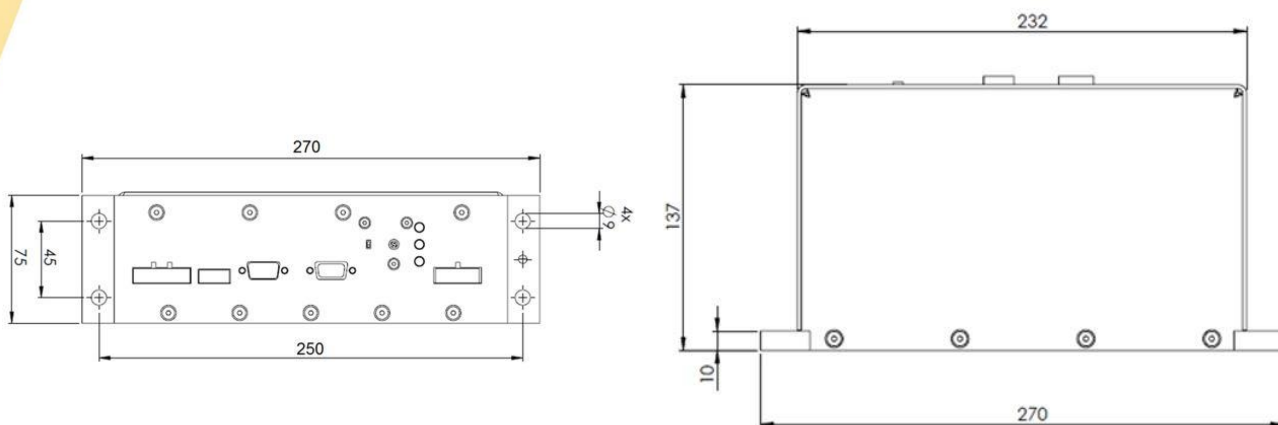

Mechanical data – Module (1x)

Length x Width x Height: 367 x 235 x 79 mm
 Weight: 5,2 kg
 Housing: IP54

Certifying Tests

Description	Conditions
IEC60068	Shock and vibration
EN 61000	Electric Magnetic Compatibility (EMC)
	Temperature test -40°C till 60°C