


HIGH VOLTAGE CAPACITOR

PPHF 50-050 d (K)

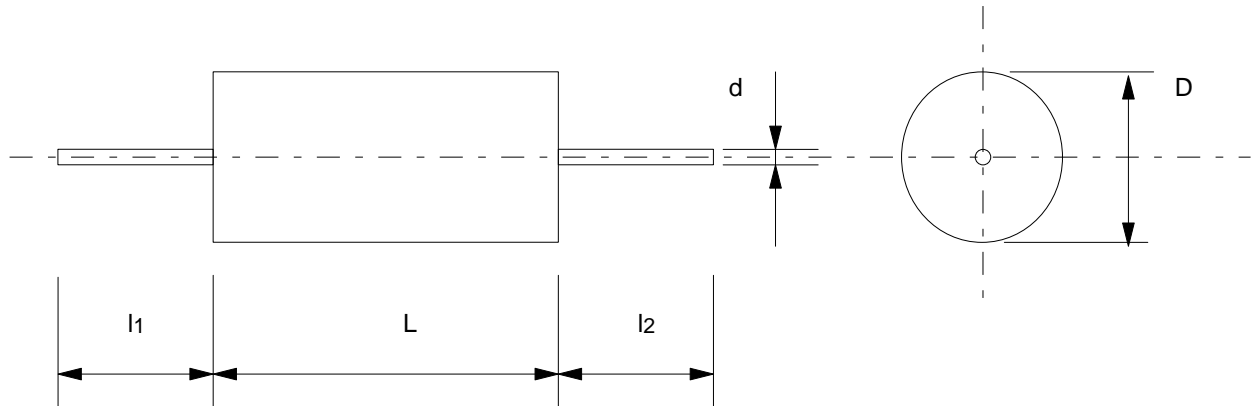

Construction: Axial type, epoxy resin end seal, protective sleeve, leads contact, Film / foil
Dry technology

Parameter	Symbol		Unit	Conditions
Capacity	C	500	nF	
Tolerance		± 10	%	
Operating voltage	UnAC	500	VAC	
	UnAC	239	VAC	20 kHz
Admissible RMS current	I _{rms}	15	A	500 kHz
ESR		1.1	mΩ	500kHz
Dielectric		Polypropylene		

Parameter	Symbol		Unit	Conditions
Diameter	\varnothing	40.5	mm	± 1 mm
Length	L	133	mm	± 2 mm
Wire leads	Tinned copper			

Distribution:	M2			
	M1			
	M0	03.04.1997	281	
	Modification	Date	Visa émetteur	

Condensateurs CH 1400 Yverdon, Switzerland
Kondensatoren Tel.: +41 24 445 66 88
Capacitors Fax: +41 24 445 66 89

Lecaniché
Capacitors
A FISCHER & TAUSSIG COMPANY