


#6079

HIGH VOLTAGE METALLIZED CAPACITORS

PPMHT 400-033 ci2 K

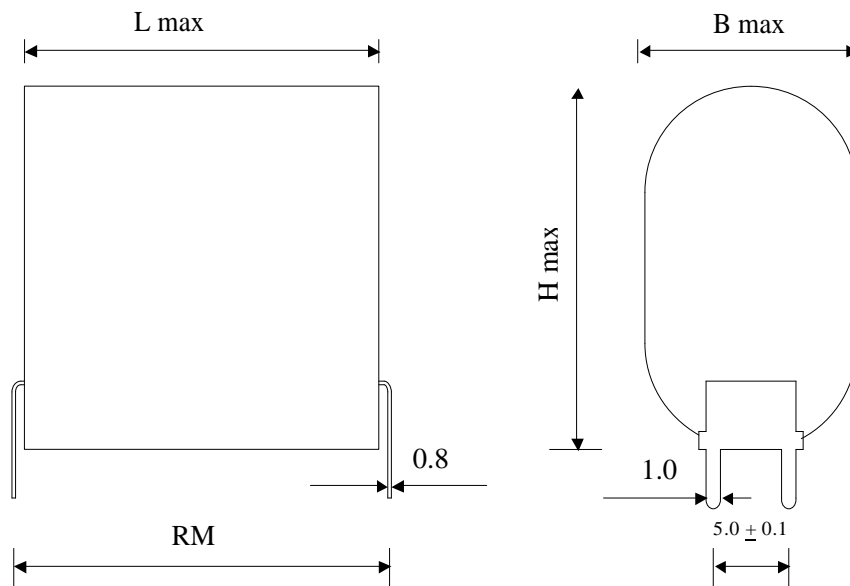

Dielectric of metallized polypropylene

Plastic sleeve / Epoxy resin sealing

Parameter	Symbol		Value	Unit	Condition
Capacitance	C		330	nF	1 V / 1 kHz
Tolerance			± 10	%	
Rated voltage	Un DC		4'000	VDC	
Rated voltage	Un AC		750	Veff	50 Hz to 400 Hz
slope of voltage variation	du/dt max.		275	V/μsec	max. repetitive
RMS current	I RMS max.		5.0	Aeff	10 kHz
Tangent delta	tgδ		< 5	10 <sup>-4</sup>	1 V / 1 kHz
Tangent delta	tgδ		< 6.5	10 <sup>-4</sup>	1 V / 10 kHz
Stray inductance	ESL		≤ 22	nH	
Insulation resistance	Ri		>90'000	MΩ	500 VDC - 1 min
Test voltage between terminals	U T1		6'400	VDC	10 s
Operating temp.			- 40 / + 85 °C		
Estimated operational life (-3%)			100'000	h	Un DC / 70°C
Dimension	Symbol			Unit	Conditions
Width	B max		20	mm	
Height	H max		37	mm	
Length	L max		47	mm	
Terminals					
Tinned brass	( 4 x )		1.0 x 0.8	mm	
RM			51 ± 0.7	mm	
	M1				
	M0				
	Modification	Date	Visa émetteur		

Condensateurs CH 1400 Yverdon, Switzerland  
 Kondensatoren Tel.: ++41 24 445 66 88  
 Capacitors Fax: ++41 24 445 66 89

**Leclanché**  
**Capacitors**  
A FISCHER & TULSCHE COMPANY

HJJ

www.Lcap.ch  
 31.01.2012

capinfo@Lcap.ch  
 faisab6079.XLS