

Application:

**AC capacitor for general use in power electronics
also for nonsinusoidal voltages and currents**

Order code:

PAM 1500-112 dv (K)


Standards:

acc. to IEC 61071:2007

Characteristics

Rated capacitance	C_N	0.012 µF ±10%
Rated d.c. voltage	U_{N DC}	- V
Rated a.c. voltage	U_{N AC}	15000 V
Max. rms voltage (sinusoidal)	U_{rms}	10600 V
Non-recurrent surge voltage	u_s	22500 V
Rated energy	W_N	1.4 Ws
Maximum current	I_{max}	5 A
Maximum peak current	î	0.58 kA
Maximum surge current	I_s	1.29 kA
Series resistance	R_s	42 mΩ
Tangent of the loss angle	tanδ_o	2 x 10 ⁻⁴
Self discharge time const.	C x R_{is}	10000 s
Self-inductance	L_e	120 nH

outline drawing

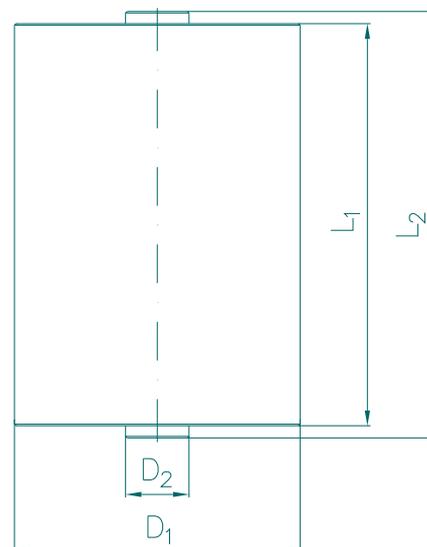

Thermal conditions

Lowest operating temperature	Θ_{min}	-25 °C
Maximum operating temperature	Θ_{max}	70 °C
Thermal resistance	R_{th}	2 kW/W
Storage temperature	Θ_{storage}	-50..+85 °C

Test data

Voltage test between terminals	U_{BB}	26250 V DC/10s
--------------------------------	-----------------------	----------------


failure rate

reference service life	100 FIT*
at Θ _{hotspot}	100000 h
	≤ 70 °C

* See FIT-RATE diagram on pg.3

Dimensions

Rated diameter	D₁	64 (±1) mm
Diameter of terminals	D₂	20 (±0.5) mm
Length of the case	L₁	570 (±2) mm
Total length	L₂	578 (±2) mm
Terminal		M8x12 mm
Clearance in air	L	614 mm
Creepage distance	K	614 mm

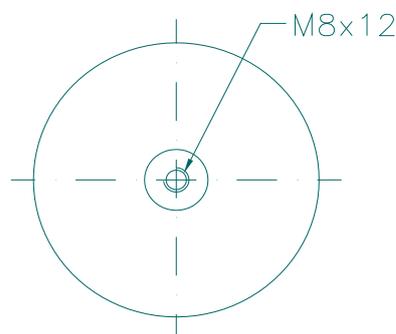

Approx weight

m	ca.	2 kg
----------	------------	------

Mechanical characteristics

Construction	MKP- metallized polypropylene capacitor, self-healing, plastic case, UL94:V0
Fuse	without internal fuse, to be used only in uncritical environment
Terminals	Screw terminals
Impregnant	no liquid impregnants, filled with solidified PUR resin, non PCB
Fire load	80MJ

Maximum permissible voltage

(Maximum within one day)

30% of on-load duration	16500
30min	17250
5min	18000
1min	19500
100ms	22500