


#6212

METALLIZED POLYPROPYLENE CAPACITORS

PAM 85-15.0 cv2d K

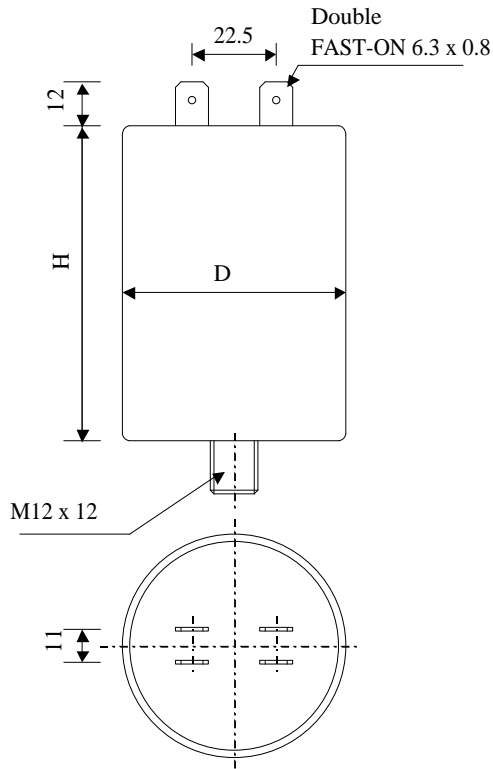

Dielectric of metallized polypropylene

Double FAST-ON 6.3 x 0.8 mm

Epoxy resin end sealing

Aluminium case

Parameter	Symbol	Value	Unit	Condition
Capacitance	C	15	$\mu\text{F}$	1 V / 1 kHz
Tolerance		$\pm 10$	%	
Rated voltage	Un AC	1200	VAC	
RMS voltage	U RMS	850	V RMS	
Surge voltage	Us	2100	V	
Repetitive surge current	I cr. max	540	A	
non repetitive surge current	Is	1800	A	
RMS current	I RMS	18	A	10 kHz
Tangent delta	tg $\delta$	$\leq 9$	10 <sup>-4</sup>	1 V / 1 kHz
Equivalent serie resistance	ESR	$\leq 6.0$	m $\Omega$	1 V / 10 kHz
Stray inductance	ESL	$\leq 100$	nH	
Test voltage between terminals	U T1	2580	VDC	10 s
Test voltage terminals to case	U T2	3000	VAC	50 Hz / 1 min
Operating Temperature		-25 to + $\xi$	$^{\circ}\text{C}$	

Dimension	Symbol	Value	Unit	Conditions
Diameter	D	55	mm	
Height	H	125	mm	
Terminals				
Double fast-on		6.3 x 0.8	mm	
fixing stud		M12 x 12	mm	
	M1			
	M0			
	Modification	Date	Visa émetteur	

Condensateurs CH 1400 Yverdon, Switzerland  
 Kondensatoren Tel.: ++41 24 445 66 88  
 Capacitors Fax: ++41 24 445 66 89

**Leclanché**  
**Capacitors**  
A FISCHER & TAUSSCHÉ COMPANY

HJJ

www.Lcap.ch  
 03.09.2013

capinfo@Lcap.ch  
 faisab6212.XLS