


#6245

METALLIZED POLYPROPYLENE CAPACITORS

PPM 16-047 gs J

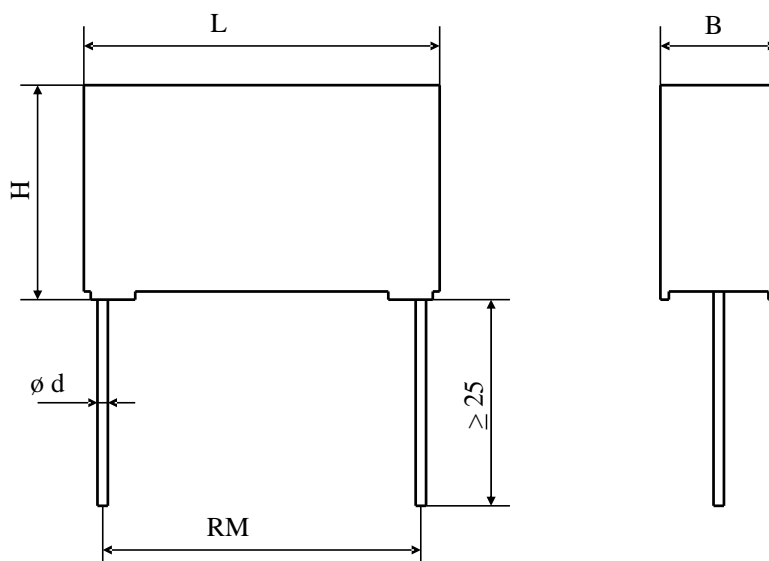

Dielectric of metallized polypropylene

Self-extinguishing plastic housing / Epoxy resin sealing

Parameter	Symbol	Value	Unit	Condition
Capacitance	C	470	nF	1 V / 1 kHz
Tolerance		± 5	%	
Rated voltage	Un DC	160	VDC	
Rated voltage	Un AC	100	VAC	50 Hz to 100 Hz
RMS Current permanent	I _{eff} max.	1.3	A _{eff}	30 kHz
slope of voltage variation	du/dt max.	50	V/ μ sec	max. repetitive
Repetitive surge current	I _{cr} max	23.5	A	
Tangente delta	tg δ	8	10^{-4}	1 V / 1 kHz
Stray inductance	ESL	≤ 25	nH	
Insulation resistance	Ri	$> 65'000$	M Ω	100 VDC - 1 min
Test voltage between terminals	U T1	256	VDC	10 s
Climatic category		55/85/56		
Estimated operational life (-3%)		100'000	h	Un DC - 70°C

Dimension	Symbol	Value	Unit	Conditions
Width	B	8	mm	
Height	H	12.5	mm	
Length	L	18	mm	
Terminals				
Axial tinned wire	d	$\varnothing 0.8$	mm	
	RM	15.24 ± 0.5	mm	
	M1			
	M0			
	Modification	Date	Visa émetteur	

Condensateurs CH 1400 Yverdon, Switzerland
 Kondensatoren Tel.: ++41 24 445 66 88
 Capacitors Fax: ++41 24 445 66 89

Leclanché
Capacitors
A FRICKER & TASSCHER COMPANY

HJJ

www.Lcap.ch
 14.01.2014

capinfo@Lcap.ch
 faisab6245.XLS