


#6106

POLYPROPYLENE METALLIZED CAPACITORS

PPM 63-010 ds K

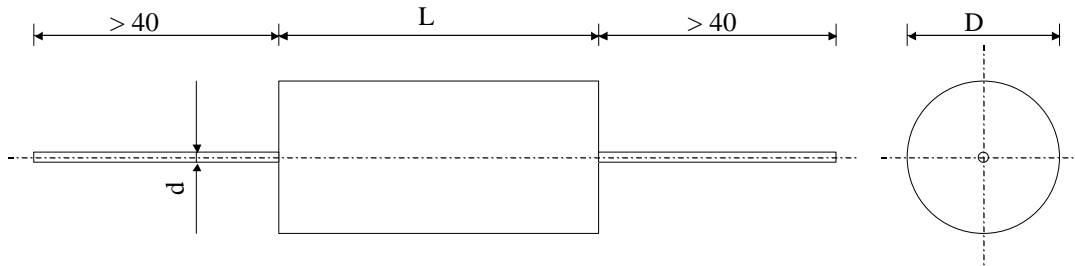

Dielectric of metallized polypropylene

Plastic sleeve / Epoxy resin sealing

Parameter	Symbol		Value	Unit	Condition
Capacitance	C		100	nF	1 V / 1 kHz
Tolerance			± 10	%	
Rated voltage	Un DC		630	VDC	
Rated voltage	Un AC		300	Veff	50 Hz to 5 kHz
slope of voltage variation	du/dt max.		500	V/μsec	max. repetitive
RMS current	I RMS max.		1.20	Aeff	10 kHz
Tangent delta	tgδ		< 4	10 ⁻⁴	1 V / 1 kHz
Tangent delta	tgδ		< 35	10 ⁻⁴	1 V / 100 kHz
Stray inductance	ESL		≤ 50	nH	
Insulation resistance	Ri		>100'000	MΩ	500 VDC - 1 min
Test voltage between terminals	U T1		1'008	VDC	10 s
Operating temp.			- 55 / + 85 °C		
Estimated operational life (-3%)			100'000	h	Un DC / 70°C

Dimension	Symbol			Unit	Conditions
Diameter	D		7	mm	
Lenght	L		26.5	mm	
Terminals					
Axial tinned wire	d		0.8	mm	
	M1				
	M0	21.06.2012	HJJ		
	Modification	Date	Visa émetteur		

Condensateurs CH 1400 Yverdon, Switzerland
 Kondensatoren Tel.: ++41 24 445 66 88
 Capacitors Fax: ++41 24 445 66 89

Leclanché
Capacitors
A FISCHER & TAUSSCHKE COMPANY

HJJ

www.Lcap.ch
 07.06.2012

capinfo@Lcap.ch
 faisab6106.XLS