


#6195

Security Capacitors


CKT 501-4BDF 63-022 K

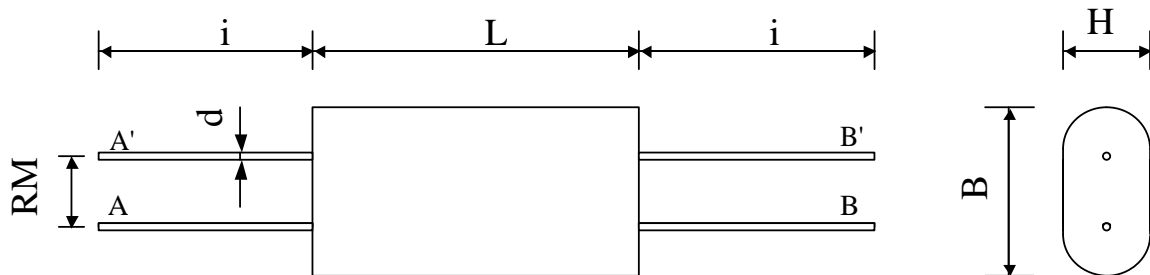

According to NFF 62-102

Dielectric of metallized polyester

Polyester wrapped UL510 / Epoxy resin sealing UL 94-V0



Parameter	Symbol	Value	Unit	Condition
Capacitance	C	0.22	μF	1 V / 1 kHz
Tolerance		± 10	%	
Rated voltage	Un DC	630	VDC	
Rated voltage	Un AC	220	Veff	50 Hz / 85°C
Tangente delta	tg δ	≤ 70	1C^4	1 kHz
Insulation resistance	Ri	$> 40'000$	M Ω	500 VDC - 1 min
Test voltage between terminals	U T1	1008	VDC	10 s
Operating temperature		- 55 / + 125 °C		
Dimension	Symbol	Value	Unit	Conditions
Width	B max	16.5	mm	
Height	H max	13.5	mm	
Length	L max	34	mm	
Terminals				
Radial tinned wire	d	0.8	mm	
RM		7.62 ± 1.0	mm	
Length	i	> 25 mm		
	M1			
	M0			
	Modification	Date	Visa émetteur	

Condensateurs CH 1401 Yverdon-les-Bains
 Kondensatoren Tel.: ++41 24 445 66 88
 Capacitors Fax: ++41 24 445 66 89

Lecdanché
Capacitors
A FISCHER & TAUSSCHKE COMPANY

HJJ

11.06.2013

faisab6195.XLS