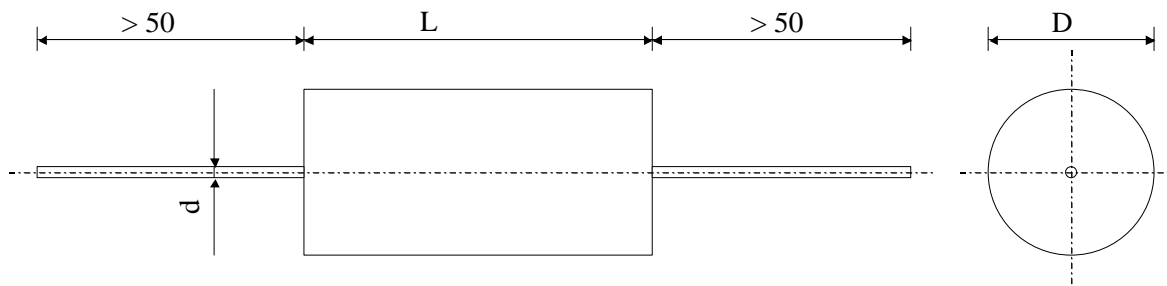


# 6073

Film / Foil Capacitors

TYPE  
KT 63-022 ds K

Polyester Film + Aluminium foil

Plastic sleeve / Epoxy resin sealing

Paramètre	Symbol	Value	Unit	Condition
Capacitance	C	220	nF	20°C, 1 kHz
Tolerance		10	%	
Rated voltage	Un DC	630	VDC	
slope of voltage variation	du/dt max.	2000	V/μsec	max. repetitive
Tangent delta	tgδ	≤ 70 E-4		1 V / 1 kHz / 25 °C
Stray inductance	ESL	≤ 40	nH	
Insulation resistance between terminals	Ri	> 50'000	MΩ	500 VDC - 1 min
Test voltage between terminals	U T1	1'260	VDC	1 min
operating temperature		- 25 / + 85	°C	

Dimension	Symbole	Value	Unité	Conditions
Diameter	D	21	mm	
Lenght	L	50	mm	
Terminals				
Axial tinned wire	d	ø 1.0	mm	

	M2			
	M1			
	M0			
	Modification	Date	Visa émetteur	

Condensateurs CH 1400 Yverdon, Switzerland  
 Kondensatoren Tel.: ++41 24 445 66 88  
 Capacitors Fax: ++41 24 445 66 89

**Lecaniché**  
**Capacitors**  
A FROEYER & TALISCHE COMPANY

HJJ

www.Lcap.ch

capinfo@Lcap.ch

12.01.2011

faisab6073.xls