

# 2.7V 1F, 100F, 150F ULTRACAPACITOR CELL

#### **FEATURES AND BENEFITS\***

- Up to 500,000 duty cycles or 10 year life
- · Low internal resistance
- · High power density
- 1F to 150F capacitance range
- -40° to 85°C operating temperature range

#### **APPLICATIONS**

- Back-up power for cache-to-flash applications
- · Smart meters
- Automotive subsystems
- Consumer and industrial electronics
- · Wireless transmitters



### PRODUCT SPECIFICATIONS

ELECTRICAL	BCAP0001	BCAP0100 T01	BCAP0150
Rated Capacitance	1 F	100 F	150 F
Minimum Capacitance, initial <sup>3</sup>	0.8 F	100 F	150 F
Maximum ESR <sub>DC</sub> , initial <sup>3</sup>	700 mΩ	15 mΩ	14 mΩ
Test Current for Capacitance and ESR <sub>DC</sub> <sup>3</sup>	0.1 A	10 A	15 A
Rated Voltage (65°/85°C)	2.70 / 2.30 V	2.70 / 2.30 V	2.70 / 2.30 V
Absolute Maximum Voltage <sup>1</sup>	2.85 V	2.85 V	2.85 V
Absolute Maximum Current <sup>5</sup>	0.8 A	36 A	40 A
Leakage Current at 25°C, maximum⁴	0.006 mA	0.260 mA	0.500 mA
TEMPERATURE			
Operating temperature range (Cell case temperature)			
Minimum	-40°C	-40°C	-40°C
Maximum	65° / 85°C	65° / 85°C	65° / 85°C
Storage temperature range (Stored uncharged)			
Minimum	-40°C	-40°C	-40°C
Maximum	70°C	70°C	70°C
PHYSICAL			
Mass, typical	1.1 g	23 g	32 g
Terminals	Wire Leads	Wire Leads	Snap in
Vibration	-	-	-
Shock	-	-	-

<sup>\*</sup>Results may vary. Additional terms and conditions, including the limited warranty, apply at the time of purchase. See the warranty details for applicable operating and use requirements.

# **PRODUCT SPECIFICATIONS**

POWER & ENERGY AT	2.7V BCAP0001	BCAP0100 T01	BCAP0150	
Usable Specific Power, P <sub>d</sub> <sup>6</sup>	1,100 W/kg	2,500 W/kg	2,000 W/kg	
Impedance Match Specific Powe	r, P <sub>max</sub> <sup>6</sup> 2,400 W/kg	5,300 W/kg	4,100 W/kg	
Specific Energy, E <sub>max</sub> <sup>6</sup>	0.9 Wh/kg	4.4 Wh/kg	4.7 Wh/kg	
Stored Energy, E <sub>stored</sub> <sup>6,9</sup>	0.001 Wh	0.101 Wh	0.152 Wh	
SAFETY				
Short Circuit Current, typical <sup>2</sup> (Current possible with short circuit from Do not use as an operating current.)	rated voltage. 4 A	180 A	190 A	
Certifications	UL810a, RoHS	UL810a, RoHS	UL810a, RoHS	



# **TYPICAL CHARACTERISTICS**

THERMAL			
Thermal Resistance (R <sub>ca</sub> , Case to Ambient), typical <sup>2,8</sup>	120°C/W	22°C/W	18°C/W
Thermal Capacitance (C <sub>th</sub> ), typical <sup>2</sup>	1.0 J/°C	23 J/°C	32
Maximum Continuous Current $(\Delta T = 15^{\circ}C)^{8,10}$ (BOL)	0.4 A <sub>RMS</sub>	6.7 A <sub>RMS</sub>	7.7 A <sub>RMS</sub>
Maximum Continuous Current $(\Delta T = 40^{\circ}C)^{8,10}$ (BOL)	0.7 A <sub>RMS</sub>	11 A <sub>RMS</sub>	13 A <sub>RMS</sub>
LIFE*			
DC Life at High Temperature <sup>3,10</sup> (held continuously at Rated Voltage & Maximum Operating Temperature)	1,000 hours	1,000 hours	1,000 hours
Capacitance Change (% decrease from minimum initial value)	30%	30%	30%
ESR Change (% increase from maximum initial value)	100%	100%	100%
Projected DC Life at 25°C <sup>3,10</sup> (at Rated Voltage & 25°C)	10 years	10 years	10 years
Capacitance Change (% decrease from minimum initial value)	30%	30%	30%
ESR Change (% increase from maximum initial value)	100%	100%	100%
Projected Cycle Life at 25°C3,7,10	500,000 cycles	500,000 cycles	500,000 cycles
Capacitance Change (% decrease from minimum initial value)	30%	30%	30%
ESR Change (% increase from maximum initial value)	100%	100%	100%
Test Current	0.1 A	10 A	15 A
Shelf Life (Stored uncharged at 25°C, <50% RH)	2 years	2 years	2 years


<sup>\*</sup>Results may vary. Additional terms and conditions, including the limited warranty, apply at the time of purchase. See the warranty details for applicable operating and use requirements.




Surge Voltage 1.

Absolute maximum voltage, non-repetitive. Duration not to exceed 1 second.

- "Typical" values represent mean values of production sample.
- Rated Capacitance &  $\mathsf{ESR}_{\mathsf{DC}}$  (measure method) 3.
  - $\bullet$  Capacitance: Constant current charge (per datasheet) to  $V_{_{\rm R}},$  5 min hold at  $V_{_{\rm R}},$ constant current discharge 10 mA/F to 0.1V.
  - ESR<sub>no</sub>: Constant current charge (per datasheet) to V<sub>R</sub>, 5 min hold at V<sub>R</sub>, constant current discharge (40 \* C \* V<sub>R</sub>[mA]) to 0.1 V.





where C is the capacitance (F);

I is the absolute value of the discharge current (A);

 $V_R$  is the rated voltage (V);  $V_A$  is the measurement start voltage,  $0.8xV_R$  (V);

V<sub>2</sub> is the measurement end voltage, 0.4xV<sub>B</sub>(V);

t, is the time from start of discharge to reach V, (s);

t, is the time from start of discharge to reach V<sub>2</sub> (s);

 $ESR_{DC}$  is the DC-ESR ( $\Omega$ );

ΔV is the voltage drop during first 10ms of discharge (V).

Typical ESR<sub>DC</sub>, Initial, 5 sec tested per Maxwell Application Note, "Test Procedures for Capacitance, ESR, Leakage Current and Self-Discharge Characterizations of Ultracapacitors" available at www.maxwell.com.

- Maximum Leakage Current
  - · Current measured after 72 hrs at rated voltage and 25°C. Initial leakage current can be higher
  - If applicable, module leakage current is the sum of cell and balancing circuit leakage currents.
- Maximum Peak Current
  - Current needed to discharge cell/module from rated voltage to half-rated voltage in 1 second.

$$I = \frac{\frac{1}{2}V_{R}}{\Delta t / C + ESR_{DC}}$$

where  $\Delta t$  is the discharge time (sec);  $\Delta t = 1$  sec in this case.

- The stated maximum peak current should not be used in normal operation and is only provided as a reference value.
- Energy & Power (Based on IEC 62391-2)
  - Maximum Stored Energy,  $E_{max}(Wh) = \frac{\frac{1}{2}CV_{R}^{2}}{3.600}$

  - Usable Specific Power (W/kg) =  $\frac{0.12 \cdot R}{ESR_{DC} \times mass}$
  - Impedance Match Specific Power (W/kg) =  $\frac{0.25 \, V_R}{ESR_{DC} \, x \, ma}$
  - · Presented Power and Energy values are calculated based on Rated Capacitance & Rated (Max.) ESR<sub>DC</sub>, Initial values.
- Cycle Life Test Profile


Cycle life varies depending upon application-specific characteristics. Actual results will vary.

- Temperature Rise at Constant Current
  - $\Delta T = I_{RMS}^2 x ESR_{DC} x R_{th}$

where ΔT: Temperature rise over ambient (°C)  $I_{\rm RMS}$ : Maximum continuous or RMS current (A)  $R_{\rm th}$ : Thermal resistance, cell to ambient (°C/W)  $ESR_{DC}$ : Rated (Max.)  $ESR_{DC}(\Omega)$ . (Note: Design should consider EOL ESR<sub>pc</sub> for application temperature rise

- Per United Nations material classification UN3499, all Maxwell ultracapacitors have less than 10 Wh capacity to meet the requirements of Special Provisions 361. Both individual ultracapacitors and modules composed of those ultracapacitors shipped by Maxwell can be transported without being treated as dangerous goods (hazardous materials) under transportation regulations.
- BOL: Beginning of Life, rated initial product performance EOL: End of Life criteria.
  - Capacitance: 80% of min. BOL rating
  - ESR<sub>DC</sub>: 2x max. BOL rating


# BCAP0001,100 (T01)

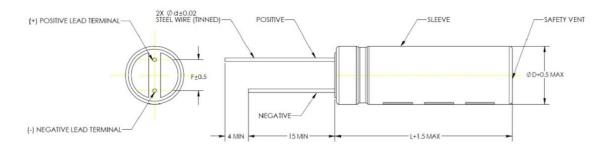

Product dimensions are for reference only unless otherwise identified. Product dimensions and specifications may change without notice. Please contact Maxwell Technologies directly for any technical specifications critical to application.

Part Description	Dimensions (mm)					Package Quantity		
BCAP0001 P270 T01	12	8	0.6	3.8	-	-	-	4,000
BCAP0100 P270 T01	45	22	1	9.5	-	-	-	400

### BCAP0150 (T07)

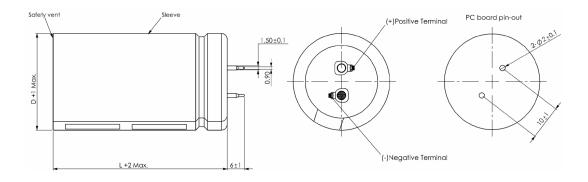

Part Description	L	<b>Dimensio</b> D	ons (mm) d	F	Package Quantity
BCAP0150 P270 T07	50	25	-	-	400

Product dimensions are for reference only unless otherwise identified. Product dimensions and specifications may change without notice. Please contact Maxwell Technologies directly for any technical specifications critical to application. Products and related processes may be covered by one or more U.S. or international patents and pending applications. Please see <a href="https://www.maxwell.com/patents">www.maxwell.com/patents</a> for more information.

Maxwell Technologies, Inc. Global Headquarters 3888 Calle Fortunada

San Diego, CA 92123 USA

Tel: +1 (858) 503-3300 Fax: +1 (858) 503-3301 Maxwell Technologies SA
Route de Montena 65

CH-1728 Rossens Switzerland

Tel: +41 (0)26 411 85 00 Fax: +41 (0)26 411 85 05 Maxwell Technologies, GmbH

Leopoldstrasse 244 80807 Munich Germany

Tel: +49 (0)89 4161403 0 Fax: +49 (0)89 4161403 99 Maxwell Technologies
Shanghai Trading Co. Ltd.

Room 1005, 1006, and 1007 No. 1898, Gonghexin Road, Jin An District, Shanghai 2000072, P.R. China Tel: +86 21 3852 4000

Fax: +82 21 3852 4099

Nesscap Co., Ltd.
17, Dongtangiheung-ro

681 Beon-gil, Giheung-gu, Yongin-si, Gyeonggi-do 17102

Republic of Korea Tel: +82 31 289 0721 Fax: +82 31 286 6767

MAXWELL TECHNOLOGIES, MAXWELL, MAXWELL CERTIFIED INTEGRATOR, ENABLING ENERGY'S FUTURE, DURABLUE, NESSCAP, XP, BOOSTCAP, D CELL, CON-DIS and their respective designs and/or logos are either trademarks or registered trademarks of Maxwell Technologies, Inc., and/or its affiliates, and may not be copied, imitated or used, in whole or in part, without the prior written permission Maxwell Technologies, Inc. All contents copyright © 2018 Maxwell Technologies, Inc. All rights reserved. No portion of these materials may be reproduced in any form, or by any means, without prior written permission from Maxwell Technologies, Inc.

