


#6332

METALLIZED POLYPROPYLENE CAPACITORS

PAM 180-010 cv4 K

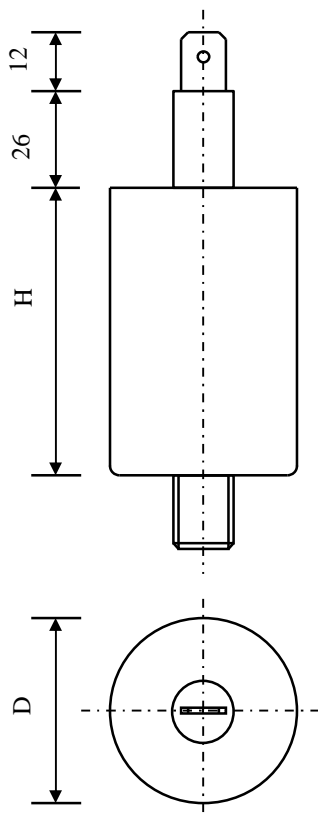

Dielectric of metallized polypropylene

FAST-ON 6.3 x 0.8 mm

Resin end sealing

Aluminium case

| Parameter | Symbol | Value | Unit | Condition |
|--------------------------------|----------------|------------|---------------|------------------|
| Capacitance | C | 0.1 | μF | 1 V / 1 kHz |
| Tolerance | | ± 10 | % | |
| RMS voltage | U RMS | 1800 | V RMS | 200 to 500 Hz |
| Peak voltage | U _p | 2400 | V | 3 ms , 5 x / day |
| Non repetitive surge voltage | U _s | 4300 | V | |
| repetitive surge current | I cr. max | 150 | A | |
| RMS current | I RMS | 7 | A | 10 kHz |
| Tangent delta | tg δ | ≤ 5 | 10^{-4} | 1 V / 1 kHz |
| Equivalent serie resistance | ESR | ≤ 52 | m Ω | 1 V / 10 kHz |
| Stray inductance | ESL | ≤ 230 | nH | |
| Test voltage between terminals | U T | 3150 | VAC | 50 Hz / 2 sec. |

| Dimension | Symbol | Value | Unit | Conditions |
|-------------|--------------|------------|---------------|------------|
| Diameter | D | 40 | mm | |
| Height | H | 129 | mm | |
| Terminals | | | | |
| Fast-on | | 6.3 x 0.8 | mm | |
| fixing stud | | M8 x 10 | mm | |
| | M1 | | | |
| | M0 | 19.08.2015 | HJJ | |
| | Modification | Date | Visa émetteur | |

Condensateurs CH 1400 Yverdon, Switzerland
 Kondensatoren Tel.: ++41 24 445 66 88
 Capacitors Fax: ++41 24 445 66 89

Lecclanché
Capacitors
A FISCHER & TAUSSCHE COMPANY

HJJ

www.Lcap.ch
 16.09.2014

capinfo@Lcap.ch
 faisab6332.XLS