





#6158

## Security Capacitors

PPM 501-4BG 40-115 K



Partially according to NFF 62-102

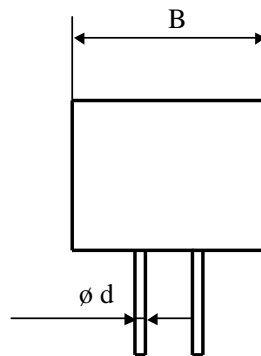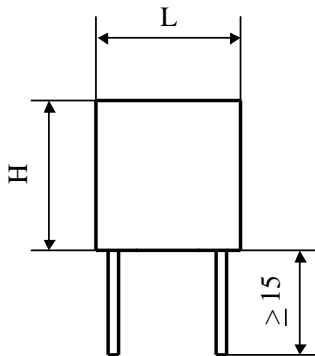Dielectric  
polypropylene metallized

Printed circuit board mounting

Self-extinguishing plastic housing

Epoxy resin sealing ( UL-V0 )

Parameter	Symbol	Value	Unit	Condition
Capacitance	C	0.015	$\mu\text{F}$	1 V / 1 kHz
Tolerance		$\pm 10$	%	
Rated voltage	Un DC	400	VDC	
Rated voltage	Un AC	200	VAC	$f \leq 1$ kHz
slope of voltage variation	du/dt max.	150	V/ $\mu\text{sec}$	
Tangente delta	tg $\delta$	$\leq 4$	$10^{-4}$	1 kHz
Resistance between 2 wire of the same armature		$< 0.1$	$\Omega$	
Stray inductance	ESL	$\leq 25$	nH	
Insulation resistance	Ri	$> 100'000$	M $\Omega$	100 VDC - 1 min
Test voltage between terminals	U T1	630	VDC	10 s
Climatic category (IEC68)		55/85/56		
Dimension	Symbol	Value	Unit	Conditions
Width	B	15	mm	
Height	H	11	mm	
Length	L	11	mm	
Terminals				
Radial tinned wire (4 x)	d	0.6	mm	
X		$7.62 \pm 0.5$	mm	
Y		$5.08 \pm 0.5$	mm	
	M1			
	M0			
	Modification	Date	Visa émetteur	

Condensateurs CH 1400 Yverdon, Switzerland  
 Kondensatoren Tel.: ++41 24 445 66 88  
 Capacitors Fax: ++41 24 445 66 89

**Leclanché**  
**Capacitors**  
A FISCHER & TROSCHE COMPANY

HJJ

www.Lcap.ch  
 07.02.2013

capinfo@Lcap.ch  
 faisab6158.XLS