


MT-V00

MT 160-1000 25040

Size: $\Phi D \times L$ (mm)		25X40	
Capacitors (μF)		1000	
Capacitance Tolerance (at 20°C 120Hz)		$\pm 20\%$ (M)	
Voltage WV(V)		160	
Operating Temperature Range (°C)		-25~+105°C	
Leakage Current (at 20°C, after 5 minutes) (μA)		≤ 1200	
Dissipation Factor ($\tan \delta$) (at 20°C 120Hz)		≤ 0.20	
Rated Ripple Current (mArms) (at 105°C 120Hz)		2100	
Low Temperature Characteristics (at 120Hz)	Impedance ratio	Z(-25°C)/Z(+20°C)	4
		Z(-40°C)/Z(+20°C)	-
Load Life	After 6000 hours application of DC rated working voltage at 105°C, the capacitor shall meet the following limits:		
	Capacitance change	$\leq \pm 20\%$ of the initial measured value	
	$\tan \delta$	$\leq 250\%$ of the initial specified value.	
	DC Leakage Current	\leq the initial specified value.	
Shelf Life	After storage for 1000 hours at 105°C, the capacitor shall meet the following limits:		
	Capacitance change	$\leq \pm 15\%$ of the initial measured value	
	$\tan \delta$	$\leq 150\%$ of the initial specified value.	
	DC Leakage Current	\leq the initial specified value.	
Others	Conforms to characteristic in JISC 5141		

DRAWING

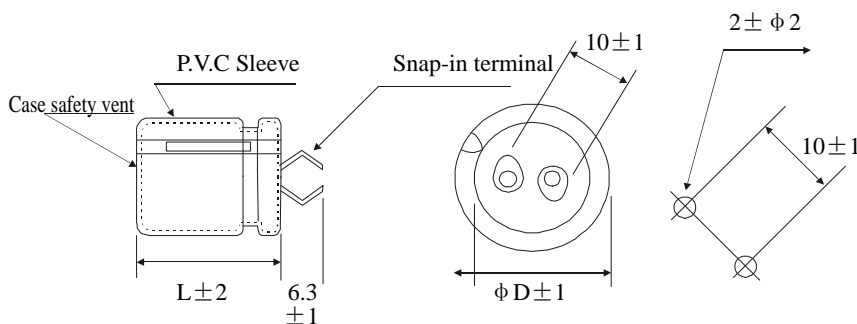

Unit: mm

$\Phi D + 1.0$	$L + 2.0$	$P \pm 1.0$
25+1.0	40+2.0	10.0