


#5646

Power Electronics Capacitors

MKT 10-3.3 a K

Preliminary  
datasheet

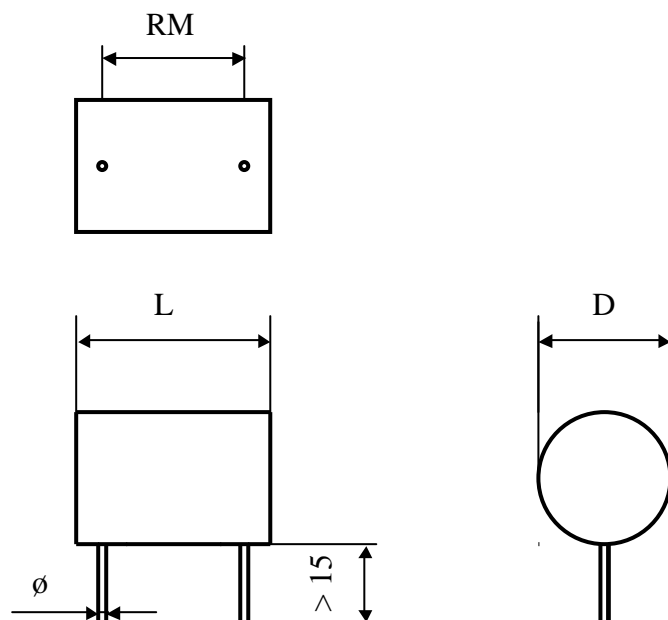

Dielectric : metallized polyester  
Polyester wrapped

Epoxy resin sealing

Parameter	Symbol		Value	Unit	Condition
Capacitance	C		3.3	$\mu\text{F}$	1 V / 1 kHz
Tolerance			$\pm 10$	%	
Rated voltage	Un DC		100	VDC	
RMS current	I RMS max.		2.5	Aeff	300 kHz / 105°C
Tangente delta	tg $\delta$		$\leq 100$	$10^{-4}$	1 kHz
Equivalent serie resistance	ESR		$\leq 15$	m $\Omega$	100 kHz
Stray inductance	ESL		$\leq 15$	nH	
Insulation resistance	Ri		238	M $\Omega$	10 VDC - 1 min
Test voltage between terminals	U T1		160	VDC	10 s
Climatic category			40/105/56		
Dimension	Symbol			Unit	Conditions
Diameter	D		12	mm	
Length	L		14	mm	
Terminals					
Radial tinned wire	$\emptyset$		0.8	mm	
RM			$8.5 \pm 0.5$	mm	
	M1				
	M0				
	Modification	Date	Visa émetteur		

Condensateurs CH 1401 Yverdon-les-Bains  
Kondensatoren Tel.: ++41 24 445 66 88  
Capacitors Fax: ++41 24 445 66 89

  
 A FISCHER & TALSCHER COMPANY

HJJ

06.03.2007

faisab5646.XLS