


#6276

HIGH VOLTAGE METALLIZED CAPACITORS

PPM 300-168 df J

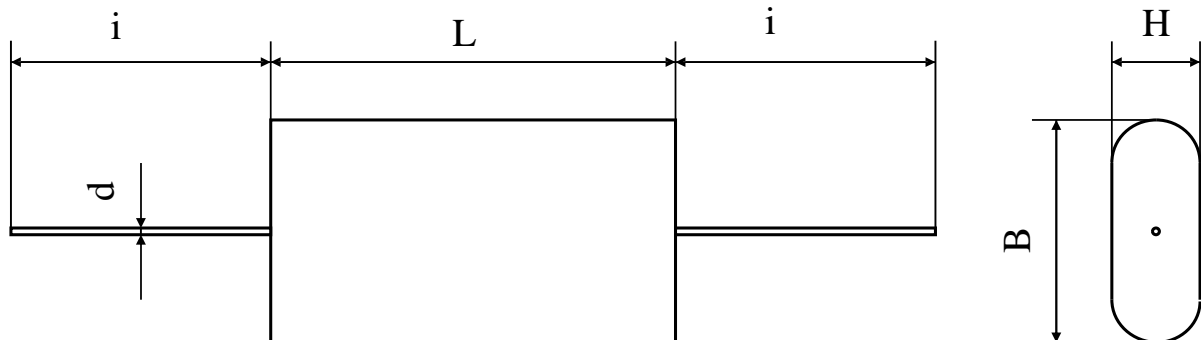

Dielectric of metallized polypropylene  
 Polyester wrapped PF-9518  
 Epoxy resin sealing  
 Suitable in oil

Parameter	Symbol		Value	Unit	Condition
Capacitance	C		68	nF	1 V / 1 kHz
Tolerance			$\pm 5$	%	
Rated voltage	Un DC		3'000	VDC	
Rated voltage	Un AC		800	Veff	50 Hz
slope of voltage variation	du/dt max.		800	V/ $\mu$ sec	max. repetitive
RMS current permanent	I RMS		3.4	Aeff	100 kHz
Tangent delta	tg $\delta$		< 5	10-4	1 V / 1 kHz
Equivalent serie resistance	ESR		< 30	m $\Omega$	1 V / 100 kHz
Stray inductance	ESL		$\leq 40$	nH	
Insulation resistance	Ri		>100'000	M $\Omega$	500 VDC - 1 min
Test voltage between terminals	U T1		4'500	VDC	10 s
Operating temp.			-40 / + 85 °C		
Estimated operational life (-3%)			100'000	h	3000 V / 70°C
Dimension	Symbol			Unit	Conditions
Width	B max		21.7	mm	
Height	H max		14.1	mm	
Length	L max		39	mm	
Terminals					
Axial tinned wire	d		$\varnothing 1.0$	mm	
	i		> 30	mm	
	M1				
	M0				
	Modification	Date	Visa émetteur		

Condensateurs CH 1400 Yverdon, Switzerland  
 Kondensatoren Tel.: ++41 24 445 66 88  
 Capacitors Fax: ++41 24 445 66 89

**Leclanché**  
**Capacitors**  
A FISCHER & TAUSSCHKE COMPANY

HJJ

www.Lcap.ch  
 21.03.2014

capinfo@Lcap.ch  
 faisab6276.XLS